



Check for updates

AUTHORS:

Anthony J. Mills¹
Ruan de Wet²

AFFILIATIONS:

¹Department of Soil Science,
Stellenbosch University, Stellenbosch,
South Africa

²C4 EcoSolutions, Cape Town,
South Africa

CORRESPONDENCE TO:

Anthony Mills

EMAIL:

mills@sun.ac.za

HOW TO CITE:

Mills AJ, De Wet R. Quantifying a sponge: The additional water in restored thicket. *S Afr J Sci.* 2019;115(5/6), Art. #a0309, 2 pages. <https://doi.org/10.17159/sajs.2019/a0309>

ARTICLE INCLUDES:

- Peer review
- Supplementary material

KEYWORDS:

soil; organic carbon; water-holding capacity; restoration

PUBLISHED:

29 May 2019

Quantifying a sponge: The additional water in restored thicket

Restoration of degraded subtropical thicket in the Eastern Cape, South Africa, can result in the return of more than 30 tonnes of soil organic carbon per hectare.^{1,2} Given that soil carbon is usually positively correlated with soil water-holding capacity³⁻⁵, we hypothesised that restoration of thicket would greatly increase the sponge effect of its soils. As a first step towards examining this hypothesis, we used a model that predicts how changes in soil texture and soil carbon affect soil water-holding capacity.

In sandy and loamy soils, increases in soil water-holding capacity will tend to range from ~1% to ~8% for each per cent increase in soil organic carbon.^{3,5-9} By contrast, within clayey soils, and within a particular range of soil carbon, an increase in soil organic matter can be expected to reduce, not increase, soil water-holding capacity. An increased sponge effect is consequently not a *fait accompli* in thicket restoration (see Figure 1).

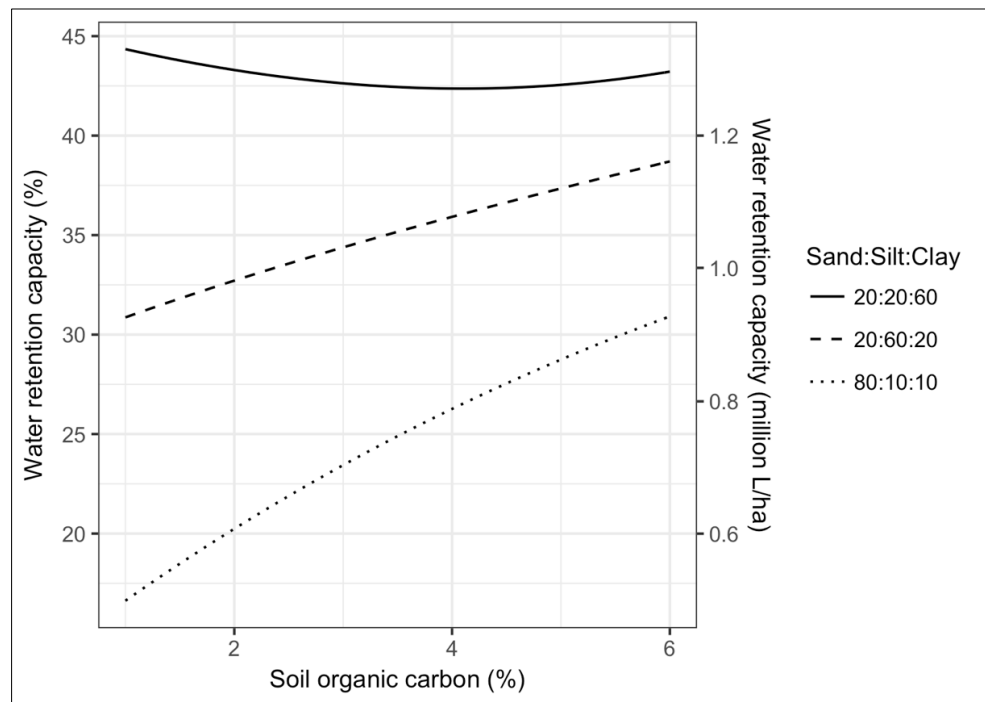


Figure 1: Modelled relationship between soil organic carbon (%) and water retention (%) using the equations of Rawls et al.³

The texture of soils across subtropical thicket varies greatly, but a large proportion are sandy (~80% sand content), with relatively small amounts of clay (~10%) and silt (~10%).¹⁰ We consequently used a ratio of 80:10:10 sand:silt:clay to estimate how much water is likely to be stored when restoring thicket. Assuming that soil carbon increases from 2% to 5% in the top 30 cm of soil¹¹, the model predicts that an extra ~255 thousand litres of extra water would be stored per hectare. Across a farm of, for example, 5000 hectares, the amount of extra water stored would be 1.28 billion litres, and across the ~1 million hectares of the subtropical thicket biome that is degraded¹² the amount would be 255 billion litres. In conclusion, restoring degraded subtropical thicket at the biome-scale is likely to result in the additional storage of more than 200 billion litres of water. To put this amount in perspective, Theewaterskloof Dam, Cape Town's main storage dam, holds ~400 billion litres when full.

The additional water storage in subtropical thicket soils would result in myriad benefits for society, including greater productivity of the landscape for livestock and game (particularly during droughts), flood mitigation, and greater flow of water from groundwater into rivers.¹³ It would be instructive for government and private landowners to have a hydrological model that shows how creating an underground dam of 200 billion litres would increase supply of water to farmers and towns across the Eastern Cape. Our hypothesis is that the economic returns from the additional water alone would be well worth the costs of restoring the 1 million hectares of degraded thicket.

Acknowledgements

We gratefully acknowledge: the South African Department of Environmental Affairs, Natural Resources Management Programme and the National Research Foundation of South Africa (grant number FA2005040700027) for funding this research; Christo Marais for conceptual discussions; and MJ Stowe for assisting with preparation of the manuscript.

© 2019. The Author(s). Published under a Creative Commons Attribution Licence.



References

1. Mills AJ, Cowling RM, Fey MV, Kerley GIH, Donaldson JS, Lechmere-Oertel RG, et al. Effects of goat pastoralism on ecosystem carbon storage in semiarid thicket, Eastern Cape, South Africa. *Austral Ecol.* 2005;30(7):797–804. <https://doi.org/10.1111/j.1442-9993.2005.01523.x>
2. Mills AJ, Cowling RM. Below-ground carbon stocks in intact and transformed subtropical thicket landscapes in semi-arid South Africa. *J Arid Environ.* 2010;74(1):93–100. <https://doi.org/10.1016/j.jaridenv.2009.07.002>
3. Rawls WJ, Pachepsky YA, Ritchie JC, Sobecki TM, Bloodworth H. Effect of soil organic carbon on soil water retention. *Geoderma.* 2003;116(1–2):61–76. [https://doi.org/10.1016/S0016-7061\(03\)00094-6](https://doi.org/10.1016/S0016-7061(03)00094-6)
4. Olness A, Archer D. Effect of organic carbon on available water in soil. *Soil Sci.* 2005;170(2):90–101. <https://doi.org/10.1097/00010694-200502000-00002>
5. Saxton KE, Rawls WJ. Soil water characteristic estimates by texture and organic matter for hydrologic solutions. *Soil Sci Soc Am J.* 2006;70(5):1569–1578. <https://doi.org/10.2136/sssaj2005.0117>
6. Havis L. Effect of different soil treatments on available moisture capacity of a vegetable soil. *Proc Am Soc Hort Sci.* 1943;42:497–501.
7. Hamblin AP, Davies DB. Influence of organic matter on the physical properties of some East Anglian soils of high silt content. *Eur J Soil Sci.* 1977;28(1):11–22. <https://doi.org/10.1111/j.1365-2389.1977.tb02291.x>
8. Emerson WW. Water-retention, organic-C and soil texture. *Soil Res.* 1995;33(2):241–251. <https://doi.org/10.1071/SR950241>
9. Minasny B, McBratney AB. Limited effect of organic matter on soil available water capacity. *Eur J Soil Sci.* 2018;69(1):39–47. <https://doi.org/10.1111/ejss.12475>
10. Mills AJ, Fey MV. Transformation of thicket to savanna reduces soil quality in the Eastern Cape, South Africa. *Plant Soil.* 2004;265(1–2):153–163. <https://doi.org/10.1007/s11104-005-0534-2>
11. Mills AJ, Cowling RM. Rate of carbon sequestration at two thicket restoration sites in the Eastern Cape, South Africa. *Restoration Ecol.* 2006;14(1):38–49. <https://doi.org/10.1111/j.1526-100X.2006.00103.x>
12. Mills AJ, Turpie JK, Cowling RM, Marais C, Kerley GI, Lechmere-Oertel RG, et al. Assessing costs, benefits, and feasibility of restoring natural capital in subtropical thicket in South Africa. In: Aronson J, Milton SJ, Blignaut JN, editors. *Restoring natural capital, science, business, and practice.* Washington DC: Island Press; 2007. p. 179–187.
13. Mander M, Jewitt G, Dini J, Glenday J, Blignaut J, Hughes C, et al. Modelling potential hydrological returns from investing in ecological infrastructure: Case studies from the Baviaanskloof-Tsitsikamma and uMngeni catchments, South Africa. *Ecosyst Serv.* 2017;27:261–271. <https://doi.org/10.1016/j.ecoser.2017.03.003>